


OVERVIEW

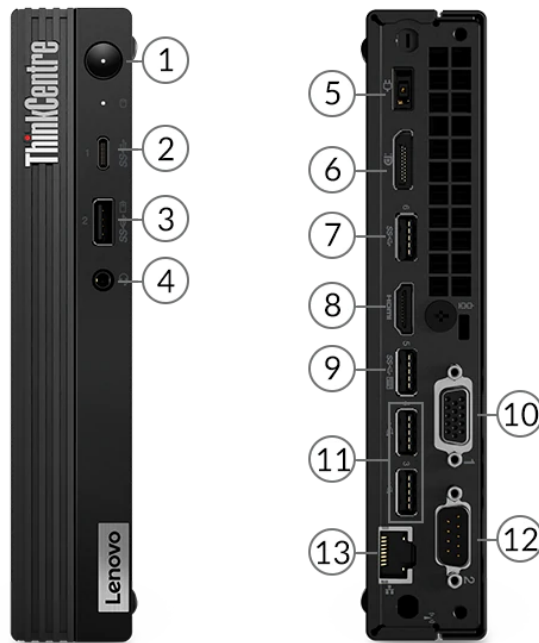

1. Power button	8. HDMI 1.4b
2. USB-C 3.2 Gen 1	9. USB 3.2 Gen 1
3. USB 3.2 Gen 2	10. Optional port 1 (VGA is shown)
4. Headphone / microphone combo jack (3.5mm)	11. 2x USB 2.0
5. Power connector	12. Optional port 2 (serial is shown)
6. DisplayPort 1.4	13. Ethernet (RJ-45)
7. USB 3.2 Gen 1	

PERFORMANCE

Processor

Processor Family

AMD Athlon™ or AMD Ryzen™ 3 / 5 / 7 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Athlon™ Gold PRO 3150GE	4	4	3.3GHz	3.8GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Graphics
AMD Athlon™ Silver 3050GE	2	4	3.4GHz	3.4GHz	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon™ Graphics
AMD Athlon™ Silver PRO 3125GE	2	4	3.4GHz	3.4GHz	1MB L2 / 4MB L3	DDR4-2666	AMD Radeon™ Graphics
AMD Ryzen™ 3 3200GE	4	4	3.3GHz	3.8GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 8 Graphics
AMD Ryzen™ 3 4300GE	4	8	3.5GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 5300GE	4	8	3.6GHz	4.2GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 4350GE	4	8	3.5GHz	4.0GHz	2MB L2 / 4MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 3 PRO 5350GE	4	8	3.6GHz	4.2GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 4600GE	6	12	3.3GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 5600GE	6	12	3.4GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 3350GE	4	8	3.3GHz	3.9GHz	2MB L2 / 4MB L3	DDR4-2933	AMD Radeon™ Vega 11 Graphics
AMD Ryzen™ 5 PRO 4650GE	6	12	3.3GHz	4.2GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 5 PRO 5650GE	6	12	3.4GHz	4.4GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 4700GE	8	16	3.1GHz	4.3GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 5700GE	8	16	3.2GHz	4.6GHz	4MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 PRO 4750GE	8	16	3.1GHz	4.3GHz	4MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen™ 7 PRO 5750GE	8	16	3.2GHz	4.6GHz	4MB L2 / 16MB L3	DDR4-3200	AMD Radeon™ Graphics

Operating System

Operating System**

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 10 Pro 64
- Windows® 10 Home 64
- Windows® 10 Home 64 Single Language
- Windows® 10 IoT Enterprise
- Windows® 10 IoT Enterprise LTSC 2021

ThinkCentre M75q Gen 2

- IGEL Linux^[1]
- Ubuntu Linux
- No preload operating system

Notes:

[1] The device is preload with a free evaluation license. The evaluation license will be valid for a period of 90 days.

Graphics

Graphics**^[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
AMD Radeon™ Graphics	Integrated	Shared	1x HDMI®, 1x DisplayPort™ 1.4, 1x optional port (VGA / 2nd DP / USB-C® / 2nd HDMI® / dual DP)	3840x2160@30Hz or 2560x1440@60Hz(HDMI®), 1920x1200@60Hz(VGA), 3840x2160(DP)@60Hz	DirectX® 12
AMD Radeon™ Vega 8 Graphics	Integrated	Shared	1x HDMI®, 1x DisplayPort™ 1.4, 1x optional port (VGA / 2nd DP / USB-C® / 2nd HDMI® / dual DP)	3840x2160@30Hz or 2560x1440@60Hz(HDMI®), 1920x1200@60Hz(VGA), 3840x2160(DP)@60Hz	DirectX® 12
AMD Radeon™ Vega 11 Graphics	Integrated	Shared	1x HDMI®, 1x DisplayPort™ 1.4, 1x optional port (VGA / 2nd DP / USB-C® / 2nd HDMI® / dual DP)	3840x2160@30Hz or 2560x1440@60Hz(HDMI®), 1920x1200@60Hz(VGA), 3840x2160(DP)@60Hz	DirectX® 12

Notes:

[1] The information of integrated graphics are not applicable for the models with processor which has no integrated graphics inside (for the details, please refer to processor section).

Monitor Support

Monitor Support

Supports up to 3 independent displays via onboard ports (DisplayPort™ + HDMI®) and optional ports (VGA / 2nd DP / 2nd HDMI® / USB-C® / 2x DP)

Chipset

Chipset

AMD PRO 500 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type^[2]

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

[2] Installed memory is actually 3200MT/s but may run as 2666MT/s, 2933MT/s or 3200MT/s depending on the memory support capability of processor.

Storage

Storage Support^[1]

Up to two drives, 1x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 1TB
- M.2 SSD up to 1TB

Storage Type***

ThinkCentre M75q Gen 2

Disk Type	Interface	RPM	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	-
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 3.0 x4	-	Opal
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-	Opal 2.0
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x2	-	-

Notes:
[1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

Removable Storage

Optical**

- DVD-ROM, slim (9.0mm), via USB external ODD box
- DVD burner (DVD±RW), slim (9.0mm), via USB external ODD box
- None

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC222 codec

Speakers

Single speaker, 1.5W x1

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
90W	Adapter	89%	Autosensing

DESIGN

Input Device

Keyboard**

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Calliope Wireless Keyboard, black
- Lenovo® Traditional Keyboard (USB connector), black
- No keyboard

Mouse**

- Lenovo® Calliope Mouse (USB connector), black
- Lenovo® Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo® Fingerprint Mouse (USB connector), Windows® Hello support, black (EOL on Jan, 2023)
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)^[1]

Models	Dimensions
Tiny only	179 x 183 x 34.5 / 37 mm with rubber feet (7.05 x 7.2 x 1.36 / 1.5 inches with rubber feet)

Packaging Dimensions (WxDxH)^[2]

- Tiny only: 490 x 250 x 130 mm (19.29 x 9.84 x 5.12 inches)
- Tiny & ODD: 490 x 268 x 166 mm (19.29 x 10.55 x 6.54 inches)

Weight^[3]

Models	Weight
Tiny only	1.25 kg (2.76 lbs)

Packaging Weight^[4]

- Tiny only: Around 3.2 kg (7.05 lbs)
- Tiny & ODD: Around 3.9 kg (8.6 lbs)

Case Color

Black

Bays

1x 2.5" disk bay

Expansion Slots

- One M.2 slot (for SSD)
- One M.2 slot (for WLAN)

EOU

(Optional) toolless chassis open (toolless chassis screw required) and toolless M.2 SSD, HDD, memory assembly / removal

Stand

- Vertical stand
- No stand

Mounting

- VESA mount bracket kit, supports VESA mount 75mm and 100mm
- None

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The new packages take effect from September 2023. The old packages are:

Tiny only: 500 x 150 x 280 mm (19.69 x 5.91 x 11.02 inches)

Tiny & ODD: 500 x 175 x 280 mm (19.69 x 6.89 x 11.02 inches)

[3] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[4] The new packages take effect from September 2023. The old package are:

Tiny only: 2.85 kg (6.28 lbs)

Tiny & ODD: 3.58 kg (7.89 lbs)

CONNECTIVITY

Network

Onboard Ethernet

- Gigabit Ethernet, Realtek® RTL8111FP, 1x RJ-45, supports DASH and Wake-on-LAN
- Gigabit Ethernet, Realtek® RTL8111HN, 1x RJ-45, supports Wake-on-LAN

WLAN + Bluetooth®**

- Realtek® RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth® 5.0, M.2 card
- Intel® Wireless-AC 9260, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- Realtek® Wi-Fi® 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card^[1]
- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card^[2]
- Intel® Wi-Fi® 6 AX200, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card
- No WLAN and Bluetooth®

Notes:

[1], [2] Bluetooth® 5.3 requires Windows® 11.

Ports^[1]

Front Ports

- 1x USB-C® 3.2 Gen 1 (support data transfer)
- 1x USB 3.2 Gen 2 (Always On and fast charge)
- 1x headphone / microphone combo jack (3.5mm)

Rear Ports^[2]

- 2x USB 2.0
- 2x USB 3.2 Gen 1
- 1x HDMI® 1.4b
- 1x DisplayPort™ 1.4
- 1x Ethernet (RJ-45)

Optional Rear Ports^{***}

- Optional port 1 (one of VGA / 2nd DisplayPort™ / 2nd HDMI® / serial / USB-C® 3.2 Gen 1 with DisplayPort™ function)
- Optional port 2 (serial)
- 2x USB 3.2 Gen 1 (occupies port 1 and 2)
- 4x USB 3.2 Gen 1 (share one USB 3.2 Gen 1 bandwidth, occupy port 1 and 2)
- 2x DisplayPort™ (occupies port 1 and 2)
- 1x parallel

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

[2] For video ports on discrete graphics, please see graphics section.

Monitor Cable**Monitor Cable**^{***}

- VGA Cable Tiny
- HDMI® to HDMI® cable (1.5m)
- HDMI® to VGA dongle
- DP to VGA dongle
- DP to VGA cable (1.5M)
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI® dongle
- No monitor cable

SECURITY & PRIVACY**Security****Security Chip**

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

Chassis intrusion switch

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Individual USB port disablement

MANAGEABILITY**System Management**

System Management

- DASH 1.2
- Non-DASH

SERVICE**Warranty**^[1]**Base Warranty**^{**}

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

OPERATING REQUIREMENTS**Operating Environment****Temperature**

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS**Green Certifications**^[1]**Green Certifications**

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Silver Registered^[2]
- (Optional) EPEAT™ Gold Registered^[3]
- ErP Lot 3
- RoHS compliant
- TCO Certified 9.0

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2], [3] EPEAT™ is registered where applicable, please visit epeat.net for registration status by country.

Other Certifications**Mil-Spec Test**

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected

models.

- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.




AMD




AMD



AMD

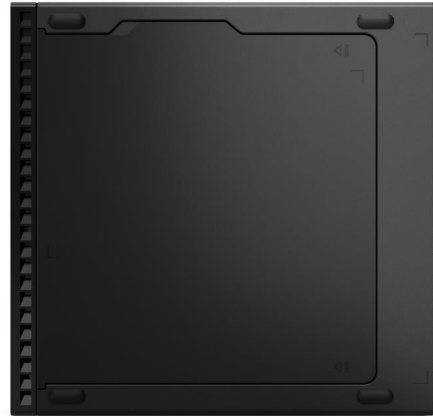

AMD

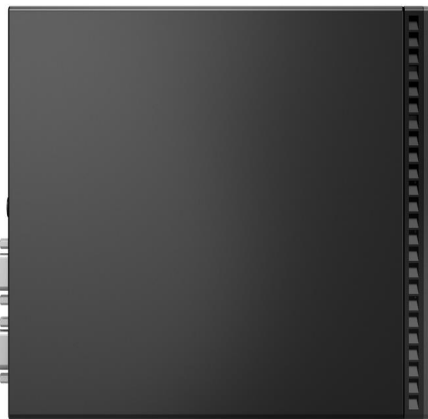

AMD



AMD